
IQ OUTLET QUICK INSTALL GUIDE


STEP 1 LOCATE OUTLET NEAR PANEL

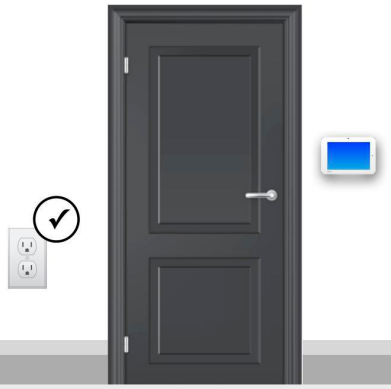

PLEASE NOTE:
PAIRING THE IQ OUTLET NEAR THE IQ PANEL IS FOR CONVENIENCE ONLY.

ONCE IQ OUTLET HAS BEEN SUCCESSFULLY PAIRED IT CAN BE MOVED ANYWHERE WITHIN ACCEPTABLE RANGE (APPROX 100 FEET OPEN AIR)


STEP 2 PLUG INTO OUTLET



STEP 3 PAIR WITH PANEL



Place your panel in "autolearn" mode




Plug in and press the button to "tamper" the device




Customize name and settings as desired and and touch "ADD"

STEP 4 DECIDE WHAT TO CONTROL



LAMPS



ELECTRONICS




APPLIANCES




ANYTHING


STEP 5 LOCATE DESIRED OUTLET



STEP 6 PLUG IN SMART SOCKET



STEP 7 PLUG DEVICE IN



Max current 13A