Quick User Manual

Using the ZD43-4K Monitor

1. Key Function Description



Ⓐ Key
Ⓑ Key Output Menu
Ⓒ + key
Ⓓ Key -
Ⓔ Confirmation Key
Ⓕ Power Indicator

2. Operating instructions

1. Turns on automatically

2. Channel selection: press A key, press B key to select the signal channel, then press E key to confirm, finally press A key to exit

3. Image Effect Design: Press B key to enter menu and press B key continuously to select different options, press C+ and D- key to adjust, then press E key to confirm and finally press A key to go ou

3. Basic Parameters

Model	ZD43-4K
Screen size	43”
Resolution	3840 * 2160
Backlight	LCD
Glow	450 cd/m²
Contrast	3000:1
input signal	HDMI / VGA / USB / AV
Consumption	97 W
Feeding	AC110-220V
Operating Temperature	0-30°
Package Dimensions	1040 * 645 * 125 (mm)

4. Diagrama De Funciones De La Interfaz

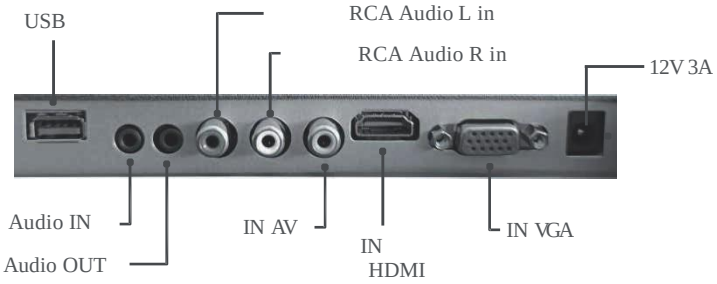



Marked “for safe use only in non-tropical climates”



“For safe use only” mark in areas below 2000m above sea level.”





www.zkteco.com

www.zktecolatinoamerica.com

Copyright © 2022, ZKTeco CO., LTD. All rights reserved.
ZKTeco may, at any time and without prior notice, make changes or improvements to the products and services or stop their production or marketing. The ZKTeco logo and trademark are property of ZKTeco CO., LTD.