Product Specification

Model No: TX750M01

1. Drawing (Unit mm)

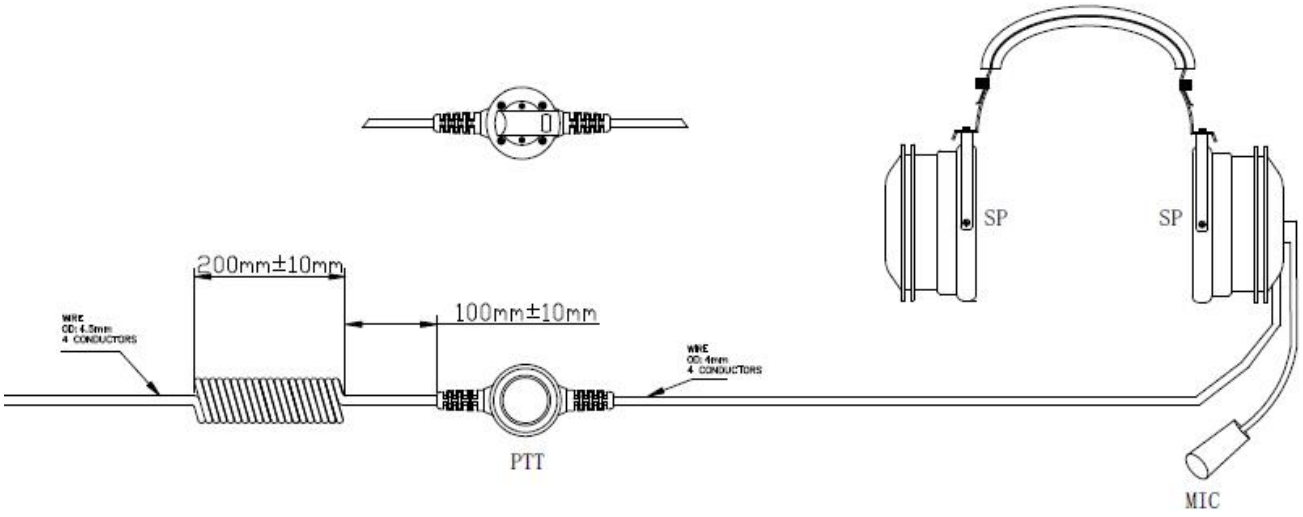

2. Picture



3. Speaker Specification

Type	Transducer Moving coil dynamic speaker
Impedance	600Ω ±15% @1KHZ
Sensitivity	108dB±10%/1Watt 0.5Meter
Resonance freq	4KHZ±20%
Frequency respond	20-4KHZ
Rated input power	500mW
Maximum input power	1000mW

4. Microphone Specification

Sensitivity Range	-44±3dB (0dB=1V/Pa,at 1KHz) 2.0V 2.2KΩ
Impedance Max	2.2KΩ
Frequency	100-10KHz
Current Consumption Max	0.5uA RL=2.2KΩ Vs=3.0V(DC)
Operation Voltage Range	1-10V (DC)
Max Sound pressure Level	110dB S. P. L